
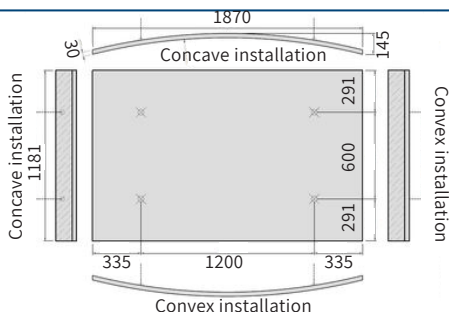


Arched Olympus

Nittobu
ACOUSTIC SOLUTIONS

Suspension systems

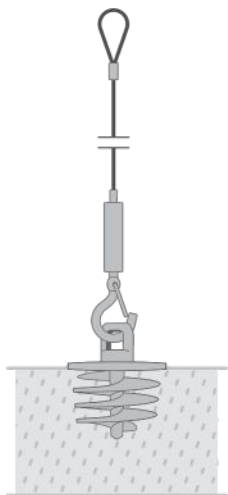

- Floating acoustic tiles.
- High-density glass wool.
- The face and back of the element are covered with EKOTEX acoustic glass fiber fleece with a paint finish to seal against fiber loss.
- The side of the element is painted and hardened. Silk matte finish in white latex (RAL color on request).
- Total weight of the system, including carriers recommended for use, approximately 5 kg per square meter.
- High noise absorption capacity.

85%
Light reflection



Sabin-o.d.s-1000mm
0.1 – 1.0

0.95
αw



Reactions to fire according
to SII 755
A2-S2,D0



75%
Recycled material content



Cleaning with a damp
cloth and/or brush
and vacuum cleaner



95%
Humidity resistance up to 95%
relative humidity at 40 °C.



installation

SP model adjustable hangers manufactured by Hecht & Efraim, installation in accordance with the manufacturer's instructions and the requirements of the SII 5103 standard.