


Olympus Baffle



Suspension systems

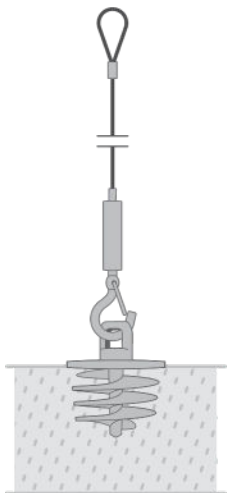

Stock sizes

1200x300 | 1200x600 | 1200x2400 | 600x2400

- › Detachable acoustic elements.
- › High-density glass wool.
- › The face and back of the element are covered with EKOTEX acoustic glass fiber fleece with a paint finish to seal against fiber loss.
- › The side of the element is painted and hardened. Silk matte finish in white latex (RAL color on request).
- › Total weight of the system, including carriers recommended for use, approximately 5 kg per square meter.
- › High noise absorption capacity.

85%

Light reflection



Sabin-o.d.s-1000mm
0.1 – 1.0

0.95
 α_w



Reactions to fire according
to SII 755
A2-S2,D0



75%

Recycled material content



Cleaning with a damp
cloth and/or brush
and vacuum cleaner



95%

Humidity resistance up to 95%
relative humidity at 40 °C.



installation

SP model adjustable hangers manufactured by Hecht & Efraim, installation in accordance with the manufacturer's instructions and the requirements of the SII 5103 standard.