




Alto Panel Wall Cladding System Stamped Stainless Steel



HECHT & EFRAIM


CONNECTING DESIGN AND CONSTRUCTION SINCE 1952



High
sustainability



Quality
management
standard




discharges



Moisture
resistance


Alto Panel Wall Cladding System - Stamped Stainless Steel Manufactured by "Hecht & Efraim" Israel.

- The panels are manufactured in a standard size of 1200X600 mm.
- Can be obtained in sizes upon request.
- Continuous monolithic appearance.
- Full discharge without devices.
- Moisture resistance.
- 10-year manufacturer's warranty.
- Includes manufacturer's installation and maintenance instructions.

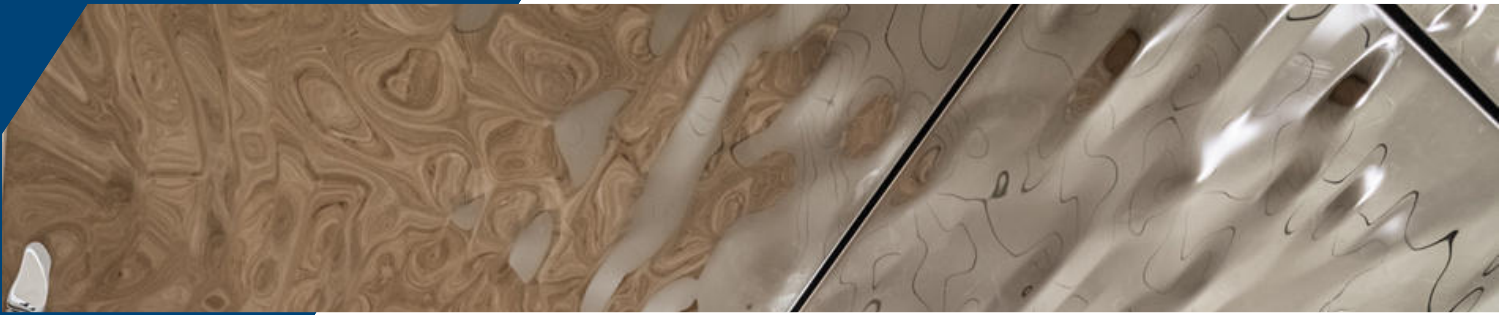

The variety of colors


*natural

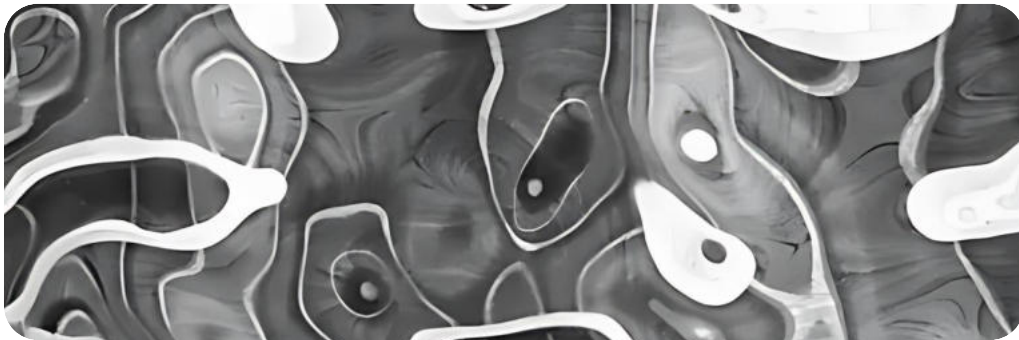

**copper



**gold

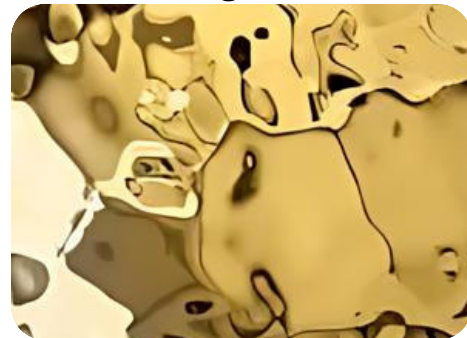

**blue




**black



*Available in stock

**Available by pre-order

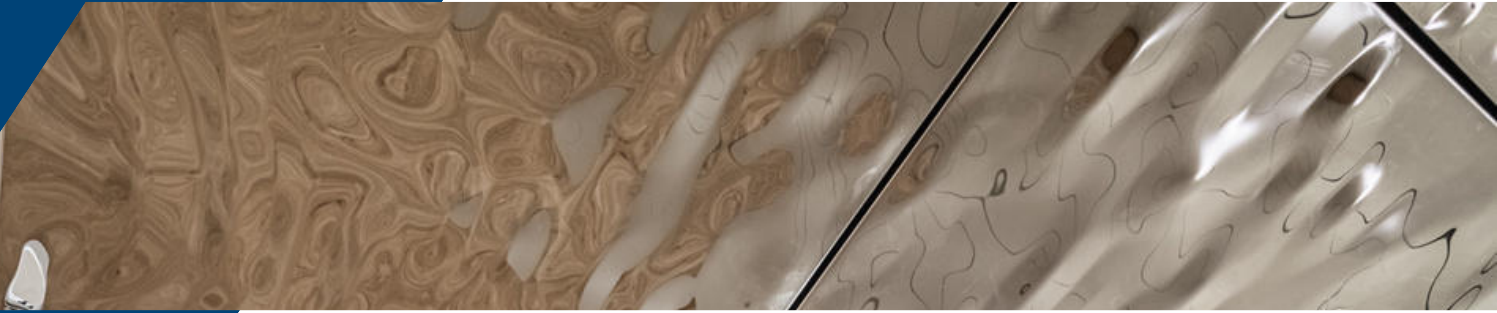



Installation instructions

1. Make sure the wall is straight and clean, place the profiles at a spacing that matches the width of the panel.
2. Attach the profile to the anchor wall using a dowel and a matching screw (Drawing 3) - If the anchor wall is not level, install it using an Omega AP profile and level it using a 25*50 angle (Drawing 6).
3. The end profile will be made using a hanging/Omega AP profile and an AP extension profile (Drawing 2,5). The AP extension profile must be placed at the end and the hanging/Omega AP profile must be fixed to the anchor wall. The extension profile must be fixed to the profile using a side screw and the wall must be leveled using it as needed.
4. The panel must be installed on the profiles from the bottom up. Attach the panel to the profiles using the designated hooks, making sure that the panel is positioned with pressure upwards. The assembly order is from the bottom panel upwards (Drawing 1,4).
5. 20 mm must be left free at the top of the system for installation and disassembly of the top panel.






Disassembly instructions

1. Carefully release the panel from the profiles by lifting upwards and pulling slightly outwards.
2. Remove the panels from the profiles and place the panel upright to avoid damaging it.
3. Dismantling will be done from the top panel downwards.

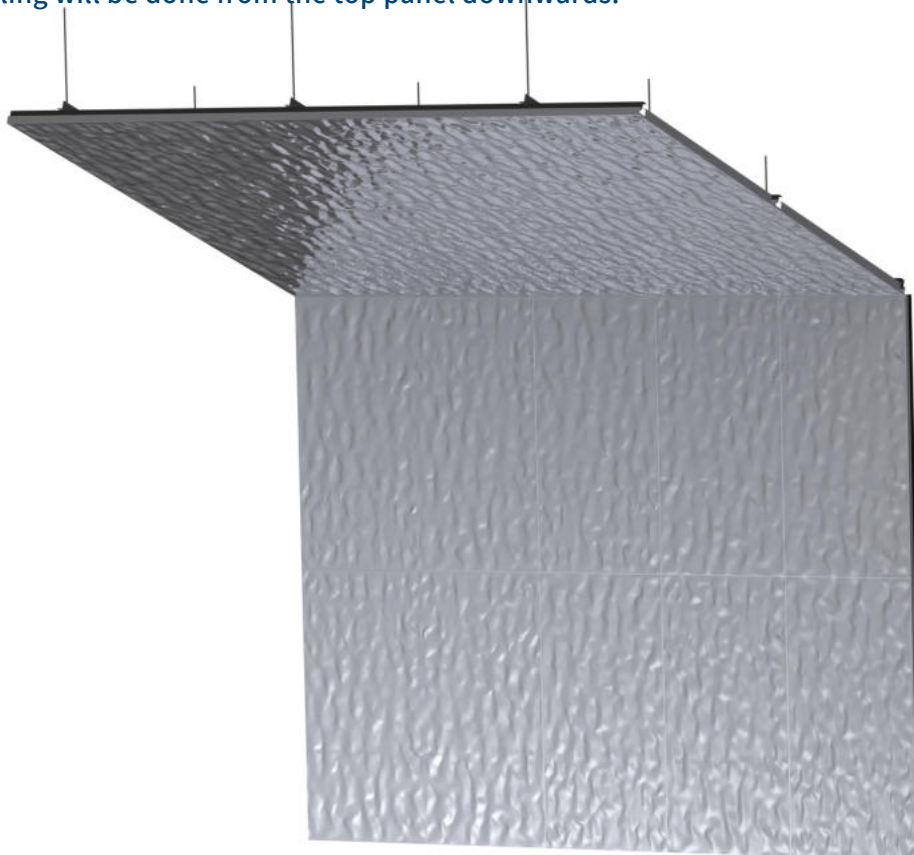

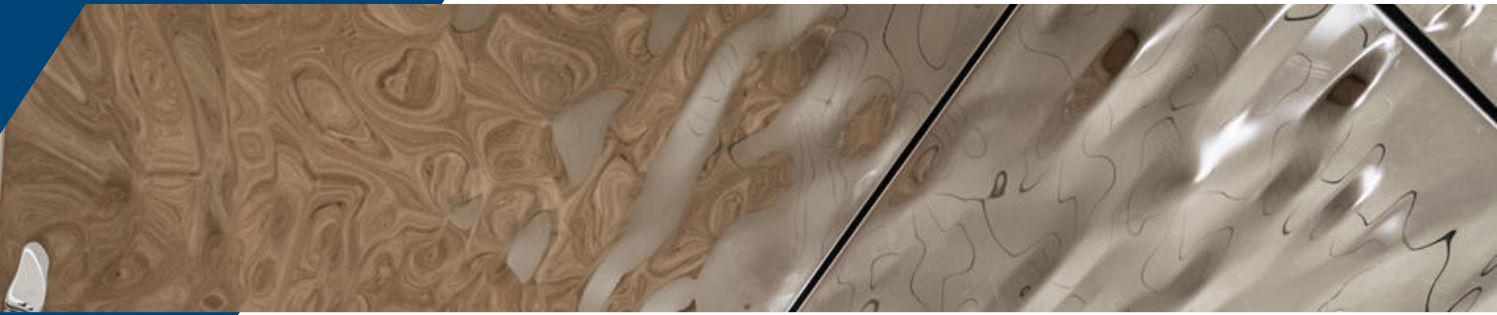

AP Omega Profile

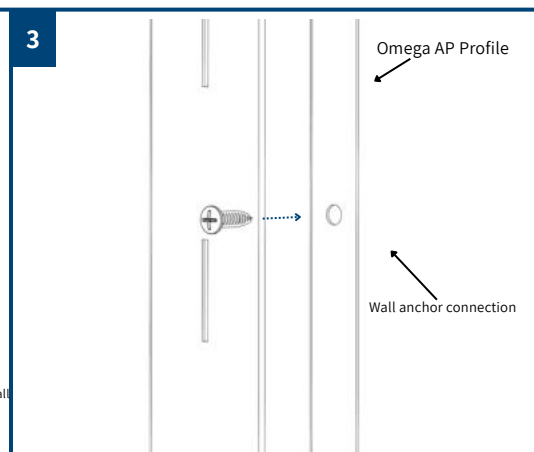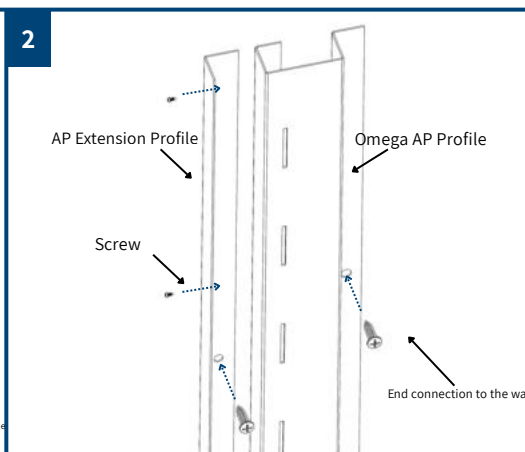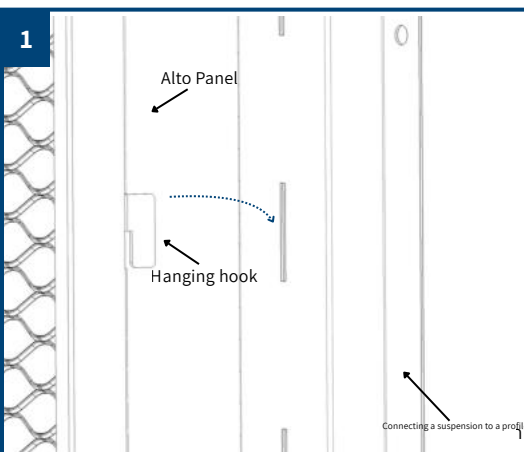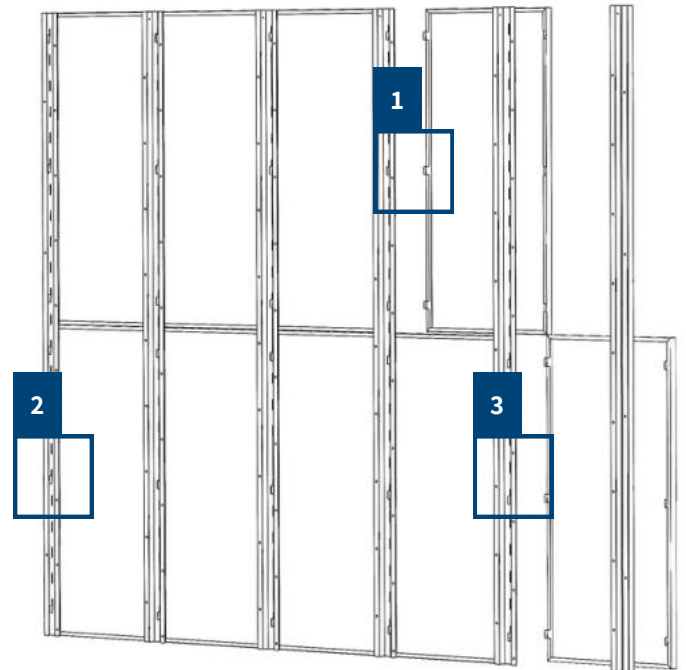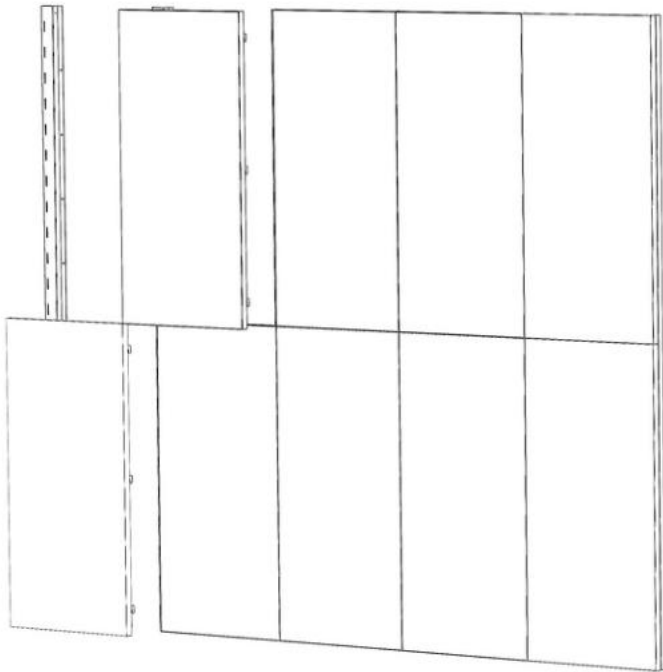



AP suspension profile

